


Edgewater Standard Styrene

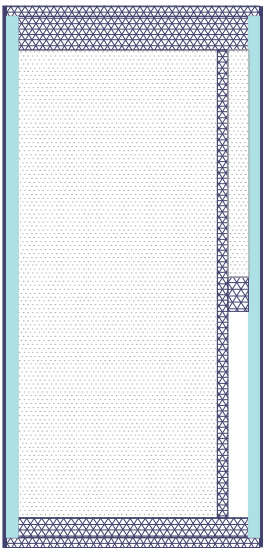

| | |
|--------------------|---|
| Thickness | 1-3/4" Standard |
| Maximum Sizes | Single 4-0 x 8-0, Regular Pairs 8-0 x 8-0 |
| Weight | Average for flush doors 4.2 lbs. per sq. ft. |
| Screw Withdrawal | Avg. per screw: Stiles 1021 ft lbs., Blocking & Rails 602 ft lbs. |
| Core | 3 lb. density Styrene |
| Stiles | FRP tubes with 1/4" thick walls and HDU outer edge. HDU can be planed to fit irregular openings. |
| Rails | Polymer composite with fiberglass strand reinforcing. 6 1/2" top rail full width for closer reinforcement. 4 1/2" bottom rail. Allows field trimming up to 1". |
| Internal Stiffener | Polymer composite with fiberglass strand reinforcing. Qty. 1 |
| Blocking | Polymer composite with fiberglass strand reinforcing. Located where needed for hardware attachment without the need for through bolts. |
| Core Assembly | All internal components are securely bonded together. |
| Face Sheets | .090 and .120 thick FRP in smooth or .120 in pebble design. |
| Adhesives | Fully waterproof |
| Machining | Complete machining for templated hardware, including electrified. |
| Available Options | Lights, louvers, dutch doors, transom panels, recessed panels, etc. |
| Cutouts | Minimum dimensions from door edge to cutout: stiles and top rail 5", bottom rail 10", between cutouts 5". |
| Finish Options | Primed, stock paint colors, custom matched paint |
| Warranty | Life of the product against corrosion induced failure and 10 years after the date of the purchase on workmanship. Factory finishes are warranted for one year from date of purchase. * See complete warranty for details. |
| R-Value | R-9.5 |

Edgewater Door Company reserves the right to change design and/or details of its products without notice.