


## EF Series Frame



### 20 Minute Fire-rated Borrowed Lite Frame\*

#### Specifications

Frames for E-F (fire) series fiberglass frames to be manufactured from 0.1875 inch (4.8mm) thick fiberglass pultrusions by Edgewater FRP Door, Neenah, Wisconsin. Profile shall be of standard hollow type to permit installation into new concrete or block walls.  
Frames shall be fabricated with mitered resin-welded corners and seamless face joints.  
Frames must be grouted solid with mortar in the field.



Fire Glazing Tape  
FG3000S45  
1/2" x 1-1/4" solid  
FRP Lite Stop

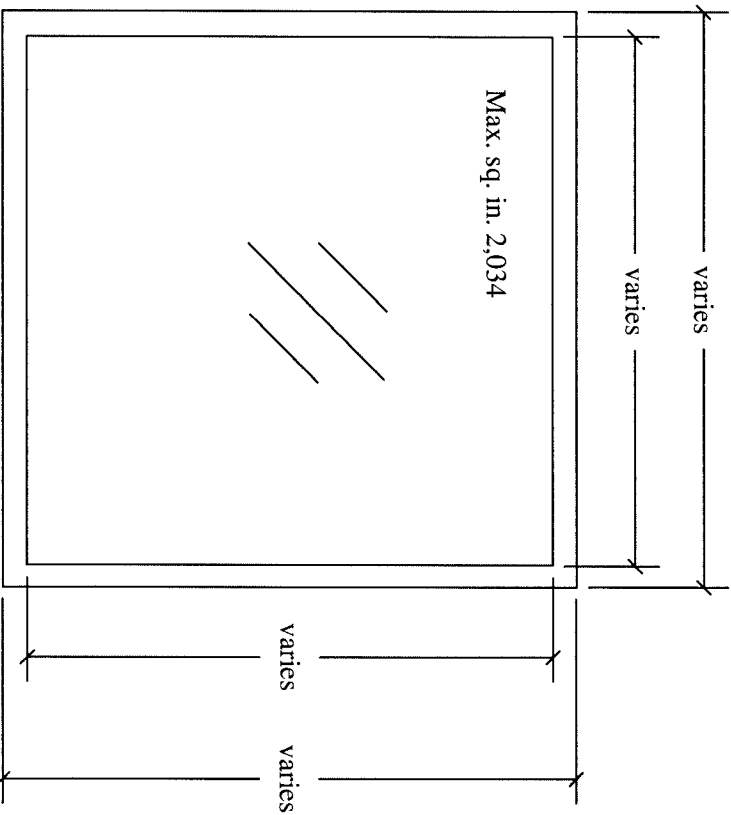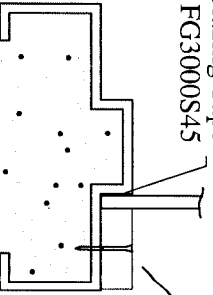

\*Tested in compliance with UL 9 (2005)

