

SAMSUNG

"It Provides
Excellent Flexibility for Teaching"



High Resolution Digital Presenter **SDP-850**

- 1/3" 850,000 pixels Progressive Scan CCD
- Outstanding 14X Optical Zoom & 3X Seamless Digital Zoom
- Vivid High Quality Image with 20fps Real-Time Motion
- Great Flexibility with Free-Angle Head & Body
- Compact & Easy-to-Use Design



High Quality
42X zoom

Samsung Digital Presenter SDP-850

Specifications

| Item | SDP-850 |
|----------------------------|---|
| Optical System | |
| Lens | F=1.5(Wide)~2.1(Tele) f=4.8~67.2mm, 14X Power Zoom |
| Shooting Area | Max : 298 x 221mm Min : 21.7 x 16.4mm Max : 11.73" x 8.7" Min : 0.85" x 0.65" |
| Zoom | Powered (14X), Digital (3X) |
| Focus | Powered (Auto Focus/Manual) |
| Iris | Auto (with fine level adjustment) |
| Illumination System | |
| Upper | Attached to the arm of the main unit |
| Lower | Light Box (option) |
| Video | |
| Pick-up Device | 1/3" 850,000 pixels PS CCD |
| Effective Pixels | 1,034(H) X 779(V) |
| Frame Rate | 20 frame/sec |
| Sync. System | Internal sync. |
| VGA Output | 1,024X768(XGA) |
| White Balance | Manual / Auto (one touch type) |
| Negative/Positive | Selectable |
| Text/Image | Available |
| Input Terminals | VGA : 1 |
| Output Terminals | VGA : 1 |
| Remote Controller | Supplied |
| Input Selection | Internal : 1, External : 1 |
| On Screen Display | Available |
| Image Freeze | Available |
| Preset Function | Up to 4 user settings |
| RS-232C | SET control |
| General | |
| Operating Temperature | 5°C ~ 35°C (40F ~ 95F) |
| Operating Humidity | 30% ~ 90% |
| Power | DC 12V, 20W (Adaptor Input: AC100V~240V Free Voltage, 50~60Hz) |
| Dimensions | In-use : 182(W) x 492(H) x 430mm(D) 7.17"(W) x 19.37"(H) x 16.93"(D) storage : 182(W) x 492(H) x 285mm(D) 7.17"(W) x 19.37"(H) x 11.63"(D) |
| Weight | 5.7kg(12.6 lbs) |
| Optional Accessories | SLB-5 (Light Box) |


Dimensions



Optional Accessories



Connection

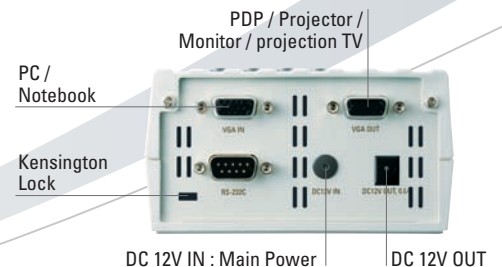

www.samsungpresenter.com



Design and specifications are subject to change without notice.

■ DISTRIBUTED BY



SAMSUNG TECHWIN CO., LTD.
145-3, Sangdaewon 1-dong, Jungwon-gu,
Seongnam-si, Gyeonggi-do 462-703, Korea
Tel : +82-31-740-8143 Fax : +82-31-740-8145

SAMSUNG OPTO-ELECTRONICS AMERICA, INC.
ELECTRONIC IMAGING DIV.
40 Seaview Drive, Secaucus, NJ 07094, U.S.A
Tel : +1-800-762-7746(X121) Fax : +1-201-902-0429

SAMSUNG TECHWIN MOSCOW OFFICE
Korp 14, 37-A, PR-KT, Leningradsky,
Moscow 125167, Russia
Tel : +7-95-258-9296, 9298 Fax : +7-95-258-9297

SAMSUNG OPTO-ELECTRONICS UK, LTD.
Samsung House, 1000 Hillswood Drive,
Hillswood Business Park Chertsey, Surrey KT16 0PS
Tel : +44-1932-45-5308 Fax : +44-1932-45-5325

TIANJIN SAMSUNG OPTO-ELECTRONICS CO., LTD.
7 Pingchang Rd., Nankai Dist. Tianjin 300190, P.R China
Tel : +86-22-2761-4724(33821) Fax : +86-22-2761-6514

I.E-0505