

Specification

Nominal Basket Diameter	10", 254mm
Nominal Impedance*	8 ohms
Power Rating**	75W
Resonance	84Hz
Usable Frequency Range	70Hz-5kHz
Sensitivity***	100
Magnet Weight	30 oz.
Gap Height	0.312", 7.92mm
Voice Coil Diameter	1.5", 38.1mm

Thiele & Small Parameters

Resonant Frequency (fs)	84Hz
DC Resistance (Re)	7.3
Coil Inductance (Le)	0.39mH
Mechanical Q (Qms)	10.8
Electromagnetic Q (Qes)	0.68
Total Q (Qts)	0.64
Compliance Equivalent Volume (Vas)	34.1 liters / 1.2 cu. ft.
Peak Diaphragm Displacement Volume (Vd)	18cc
Mechanical Compliance of Suspension (Cms)	0.18mm/N
BL Product (BL)	11.5 T-M
Diaphragm Mass inc. Airload (Mms)	20 grams
Efficiency Bandwidth Product (EBP)	156
Maximum Linear Excursion (Xmax)	0.5mm
Surface Area of Cone (Sd)	366.1 cm ²
Maximum Mechanical Limit (Xlim)	

Mounting Information

Recommended Enclosure Volume	
Sealed	Acceptable
Vented	Acceptable
Overall Diameter	10.11", 256.8mm
Baffle Hole Diameter	9.13", 231.8mm
Front Sealing Gasket	fitted as standard
Rear Sealing Gasket	fitted as standard
Mounting Holes Diameter	0.23", 5.7mm
Mounting Holes B.C.D.	9.6", 243.8mm
Depth	4.3", 109mm
Net Weight	6.4 lbs., 2.9 kg
Shipping Weight	8.2 lbs., 3.7 kg

Materials of Construction

Copper voice coil
 Polyimide former
 Ferrite magnet
 Non-vented core
 Pressed steel basket
 Paper Cone
 Paper cone edge
 Zurette dust cap




 The Art and Science of Sound


RAGIN CAJUN™



ragin ca'jun n. a very hot 10" American guitar speaker with rockin' blues tone

Coloration: Very loud, touch-sensitive and responsive with nice bell-sounding top end and a little bite

Genre: American Rock, Blues, and Country

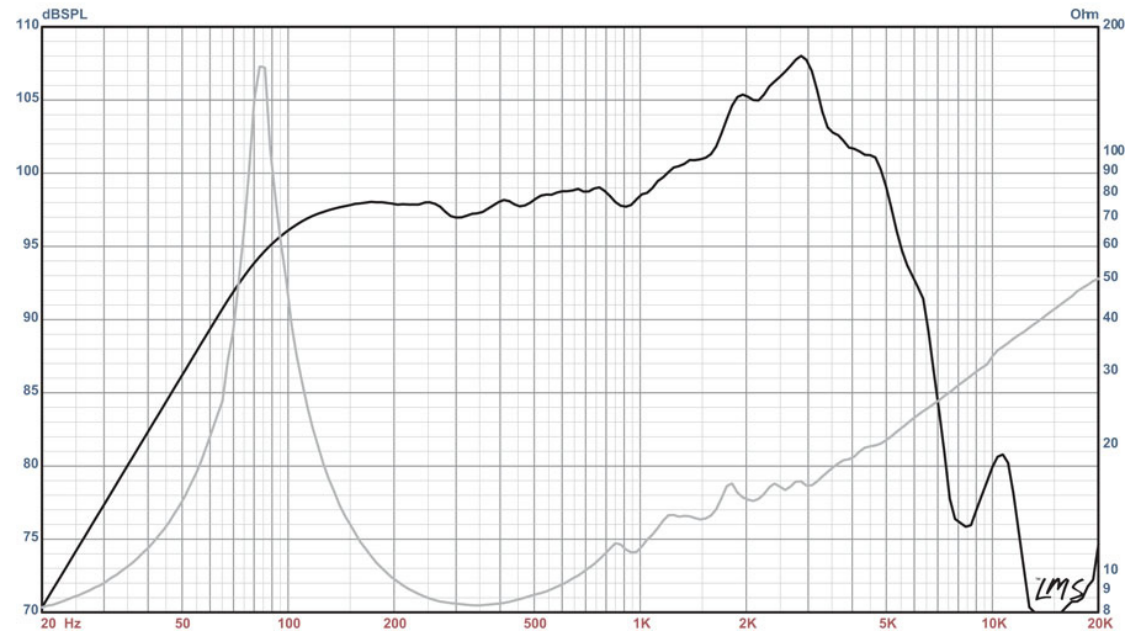

* Please inquire about alternative impedances.

** Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, non-temperature controlled environment.

*** The average output across the usable frequency range when applying 1W/1M into the nominal impedance. ie: 2.83V/8ohms, 4V/16ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1w/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft. X 2ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)