



1274 South Adams St.
Bluffton, IN 46714
Ph. 260.827.0491
Fax 260.827.0490
www.EnduranceInc.net



e560 ATTIC SYSTEM



e560 SYSTEM WITH RECLAIM ATTACHMENT

With over 75 years of experience in the insulation application industry, Endurance has designed a patented, versatile, multi-fiber, field proven insulation application system. Endurance insulation application systems are designed to provide the professional contractor with unparalleled performance and the potential opportunity of a high return on investment.

The Endurance e560 application system is designed for the professional contractor that requires user-friendly installation equipment that provides speed, reliability, and versatility all at a competitive price. The unique design of the e560 increases profit while minimizing cost.

ONE MACHINE TO MEET ALL YOUR APPLICATION NEEDS

MATERIAL	APPLICATION	50' of 4" + 100' of 3"		150' of 4"	
		Lbs/Hr	Bags/Hr	Lbs/Hr	Bags/Hr
Fiberglass	Blown	1,900	59	2,200	68
Cellulose	Blown	4,800	160	5,100	170
Cellulose	Blown (Stab.)	3,200	106	3,500	116
Dense Pack	Blown	Applicator Determined			
Wall Injection	Blown	Applicator Determined			
Fiberglass	Sprayed	Applicator Determined			
Cellulose	Sprayed	Applicator Determined			
Fireproofing	Sprayed	Applicator Determined			

Production rates are based on 150 feet of hose, 30lb bags (cellulose), 32lb bags (fiberglass) and are subject to product and job condition variables.

FEATURES

Consistent Feed Rate

Patented e560 agitation system conditions, conveys, and continuously re-circulates an **excess** supply of material over the variable feeder opening to assure a uniform supply of material and **eliminates the need for transmissions.**

Increased Material Flow

Patented self-modulating airflow system **automatically adjusts** to changes in the material flow allowing the feed system to consistently function at the maximum capability and **increase product flow** through the hose while virtually **eliminating nuisance hose plugging.**

Air Lock Feeder

Patented rotary feeder greatly **enhances seal life, reduces mechanical shock** load on the drive system, and allows **uniform feed** through the air lock.


High Performance Reclaim System

Patented high performance **filter-less** reclaim vacuum system gives the e560 the **most powerful and efficient** wall-spray system available that requires **no additional floor space.**



SPECIFICATIONS

- Largest hopper capacity on the market (160 ft.³)
- One 600 cfm blower
- 36" Muffler decreases noise by half
- Sealed non-grease bearings
- Oversized agitator shafts
- #60 drive chain
- Hardened tooth sprockets
- A single 14" x 26" airlock with long life seals
- Easy seal changes with slide out airlock
- All guards are mechanically released
- Counter weighted hopper gate for easy operator access
- Machine with reclaim attachment 29 Sq.Ft. of floor space
- PTO driven
- Full turnkey system
- Size: 72" W x 58" D x 92" H

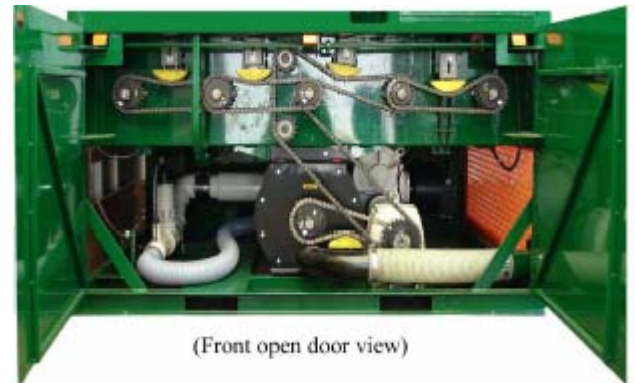

(Front open door view)