


Edgewater Fire

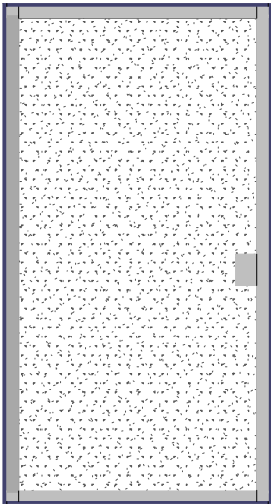

| | |
|------------------|---|
| Thickness | 1-3/4" Standard |
| Maximum Sizes | Single 4-0 x 8-0, Pairs 6-0 x 7-2 |
| Weight | Avg. for flush doors 5.7 lbs. per sq. ft. |
| Screw Withdrawal | Avg. per screw: Stiles 965 ft. lbs., Blocking & Rails 1,214 ft. lbs. |
| Core | Mineral |
| Stiles | 2" High Density Fire Rated Material with a HDU outer edge concealing the intumescent. HDU can be planed up to 1/8" to fit irregular openings. |
| Rails | 2" High Density Fire Rated Material with HDU outer edge. Top rail has concealed intumescent. |
| Blocking | High Density Fire Rated Material. Each door will have a lock block for the latching device. Additional blocking available as required by specifications. |
| Core Assembly | All internal components are securely bonded together. |
| Face Sheets | .090 or .120 thick FRP in smooth |
| Machining | Complete machining for approved hardware, including electrified with raceway. |
| Lights | Metal vision kits to maximum 100 sq. inches. |
| Cutouts | Minimum dimensions from door edge to cutout: stiles and top rail 5", bottom rail 10", between cutouts 5". |
| Finish Options | Primed, stock paint colors, custom matched paint |
| Tested Standards | UL 10C, NFPA 252 & CAN/ULC S104 |
| Warranty | Life of the product against corrosion induced failure and 10 years after the date of the purchase on workmanship. Factory finishes are warranted for one year from date of purchase. * See complete warranty for details. |

Edgewater Door Company reserves the right to change design and/or details of its products without notice.