

EF Series Frame

90 Minute Fire-rated Frame

Specifications



Frames for E-F (fire) series fiberglass frames to be manufactured from 0.1875 inch (4.8mm) thick fiberglass pultrusions by Edgewater Door Neenah, Wisconsin. Profile shall be of standard hollow type, for installation into masonry poured/block walls only. Frames fabricated with mitered corners, drilled and countersunk for #12 wood screws. Supplied with (4) FRP corner brackets to be installed in frame rabbets and secured with 3/4" stainless wood screws. 45, 60 and 90 minute doors are supplied with 90 minute FRP frames. Labeled frames meet Intertek listings and approvals. It is the End User's responsibility to ensure all components used in the openings meet or exceed the fire ratings required.

(set-up and resin welded frames will ship with temporary spreader bar)

Frames will be machined for ANSI hardware preps, unless specified

Welded frames are chemically bonded utilizing
 (2) 1-1/2" x 3" x 3/16" FRP plates
 and (1) 5-1/4" x 3" equal leg FRP angle

5-3/4" x 2" profile (standard)

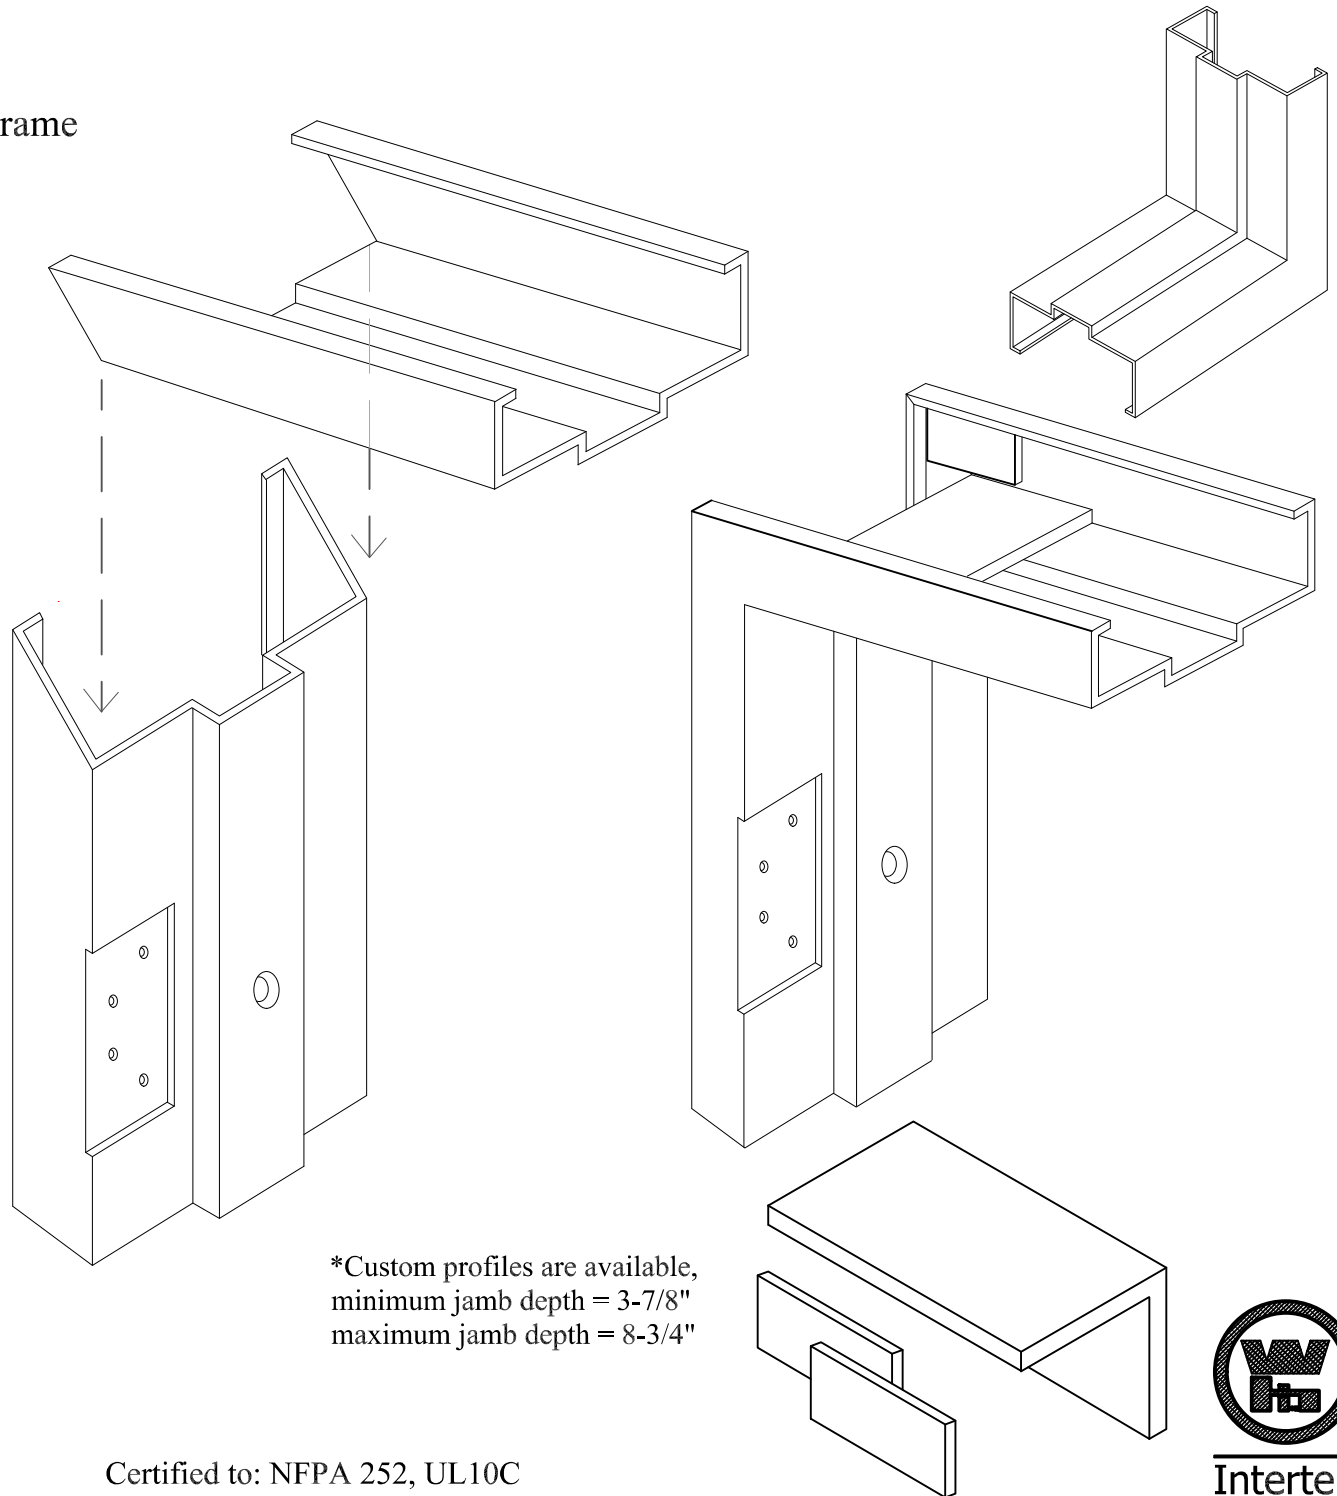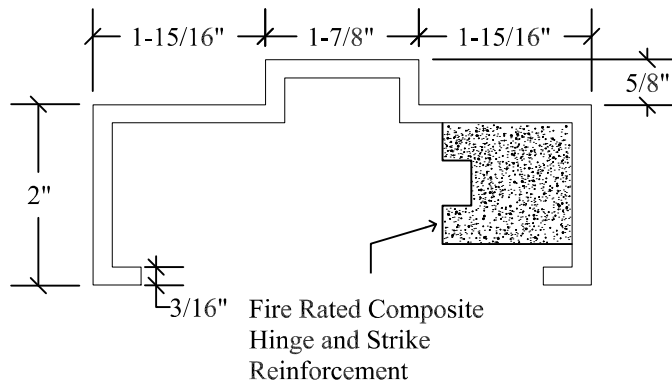

*Custom profiles are available,
 minimum jamb depth = 3-7/8"
 maximum jamb depth = 8-3/4"

Certified to: NFPA 252, UL10C



Intertek